

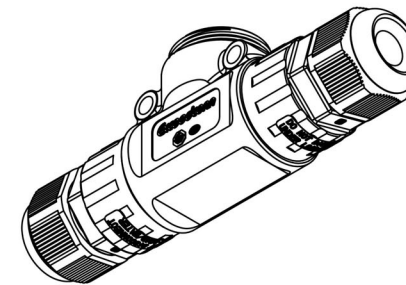


2301232002_AC T Connector(3C,17.5A)


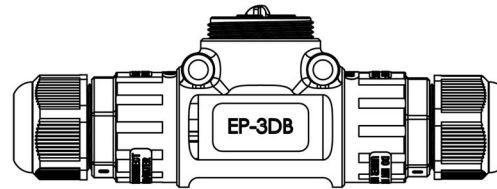


CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE

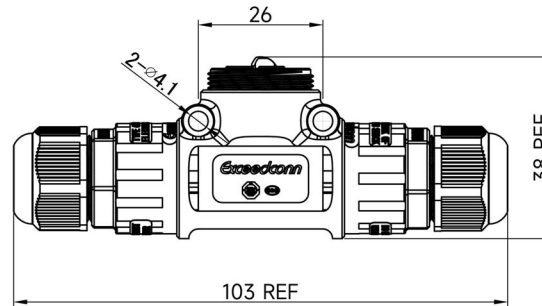

Packing

Wrench



Notes:

Electrical

1. Rated Voltage: 250V;
2. Rated Current: 17.5A;
3. Contact Resistance: ≤10mΩ;
4. Insulation Resistance: ≥500MΩ;

Mechanical:



1. Mating Cycle: ≥500;
2. Cable Retention Force: ≥100N;
3. Sealing Size: φ11.5mm;
4. Cable O.D: 9.5~11.5mm;
5. Wire Size: 1.5mm²;

Environmental:

1. Waterproof Rate: IP68;
2. Application Temperature: -40°C~+85°C;
3. Flaming Level: UL94-V0;

Others:

1. Type No.: EP-3DB;
2. Packaging: Blank Cartons

TOLERANCES UNLESS OTHERWISE SPECIFIED		MATERIAL		 APsystems ALTENERGY POWER
X: ±1.00	X*: ±3.00°			
.X: ±0.50	.X*: ±2.00°			
.XX: ±0.20	.XX*: ±1.00°			
.XXX: ±0.10	.XXX*: ±0.50°			
DWN.	UNIT mm		NAME	
CHK.	SHEET OF REV.		AC T Connector(3C,17.5A)	
			DRAWING NO.	